

DuoProx® II

Multiple Technology Proximity Card

The new, RF programmable DuoProx II Multiple Technology Proximity Card offers proximity, magnetic stripe and photo identification technologies on a single access control card. Now OEMs, distributors, and dealers using HID's Field Programmer's can ship graphics quality proximity cards, custom encoded to their customers' requirements, from their own inventory. Smaller order quantities, special coding, even overnight delivery are now possible with the DuoProx II card and HID Field Programmer.


The DuoProx II card provides a solution for companies desiring to use one card incorporating proximity, magnetic stripe and photo identification technologies for multiple applications. The DuoProx II card now accepts both horizontal and vertical slot punching, eliminating the need for badge holders. The DuoProx II card meets ISO standards for thickness, for use with all direct image printers and magnetic stripe readers.

The DuoProx II multiple technology card is another example of HID's long-term commitment to responding to the needs of the access control marketplace.

NEW !
RF Programmable

1336 Series



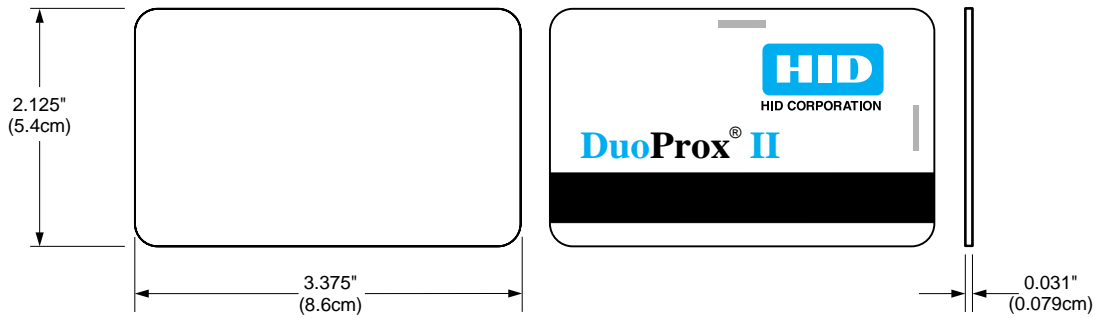

Specifications

Typical maximum* read range:

MiniProx™ reader	up to 4" (10 cm)
ThinLine II™ reader	up to 4" (10 cm)
ProxPro™ reader	up to 6" (15 cm)
NT MaxiProx™ reader	up to 16" (40 cm)

Dimensions:

2.125" x 3.375" x 0.031" max.
(5.40 x 8.57 x 0.079 cm)

Card construction:

DuoProx® II multiple technology cards are a thin, flexible polyvinyl chloride (PVC) laminate with an ABA standard, high coercivity magnetic stripe rated 4000 Oerstad.

Operating temperature:

-50° to 160° F (-45° to 70° C)

Weight:

0.24 oz. (6.8 gm)

*Depending on local installation conditions.

Part number

Base Part No.: 1336

Description: 125 kHz, RF Programmable,
Plain White Glossy Finish (front),
HID Artwork (back), Customer
Specified ID Numbers,
Locations Marked for Slot Punch

- Options:
- Card Finish for Direct Printing
 - External Card Numbering
 - Slot Punch (Horizontal or Vertical)
 - Custom Graphics

(Please see "How to Order" guide for a description of the options and associated part numbers.)

Features

Proven, reliable technology: The read range of the DuoProx II proximity card is extremely consistent. It is not affected by body shielding or variable environmental conditions, even when close to keys and coins.

Thin: Carry it with your credit cards in your wallet or purse.

Photo compatible: The DuoProx II card can be directly printed with video image printers and vertically or horizontally slot punched for easy use.

Cross-reference: A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration. External numbering matching the encoded numbers is available.

Security: The DuoProx II proximity card offers over 137 billion unique codes.

Long life: DuoProx II proximity cards offer a passive, no-battery design, allowing for an infinite number of reads.

Durability: DuoProx II proximity cards are strong and flexible for resistance to cracking and breaking.

Custom graphics: Custom multicolor graphics are available.

Warranty:

DuoProx II proximity cards are warranted against defects in materials and workmanship for 15 months from date of shipment. (See complete warranty policy for details.)

Specifications subject to change without notice.

LT1336DS 12/97, supersedes 2/97

Printed in the U.S.A.

© HID Corporation, 1997



9292 Jeronimo Road, Irvine, California 92618-1905 U.S.A.
Tel: (714) 598-1600 (800) 237-7769 Fax: (714) 598-1690
Internet Address: <http://www.prox.com>